


# Omnipure Replacement Cartridges

## Granular or Carbon Block Media

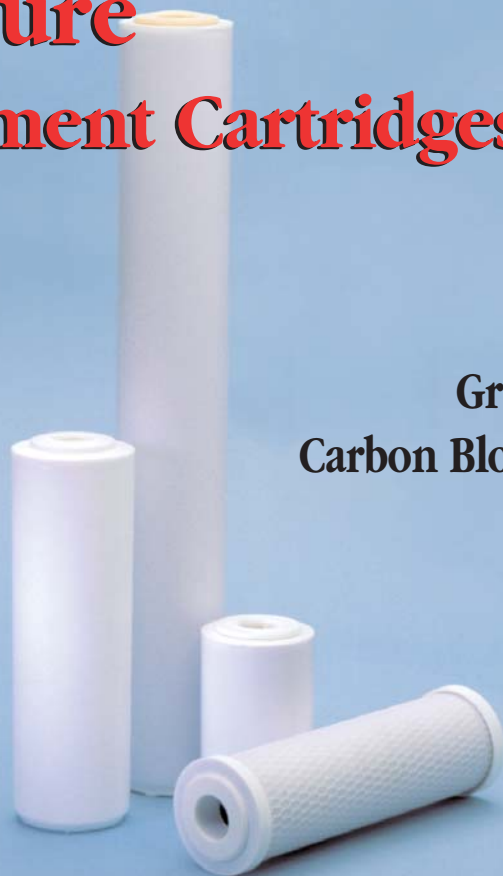

### Cartridges You Can Count On.

Omnipure Filter Company offers three series of replacement filter elements for use in systems or as stand alone units – the OC-Series, the CS Series and the OMB Series.

With the highest volume in the industry, the OC-Series filter elements are designed to fit most standard 4-7/8", 9-3/4" and 20" cartridge housings. Omnipure utilizes a spring loading device to compress the media, reducing media migration and ensuring that the water passes properly through the media for optimum filtration.

The Ultra Slim Line, or CS-Series, filter element is engineered to fit any 9-3/4" housing including the narrower models now on the market. The Slim Line includes all of the engineering features available on the OC-Series in a small, slender profile.

The OMB Series of replacement cartridges feature the new OmnipureBlock™ media. This high quality carbon block media is manufactured from raw materials to precise specifications entirely at the Omnipure manufacturing facility. Filter elements are available in 10 micron, 5 micron, 1 micron and 1 micron lead reduction formulations. Elements are finished with a single layer of spun-bonded polypropylene netting. Polypropylene end caps with compression gaskets are standard. Ask your Omnipure representative about custom formulations and alternative finishing options.

**The Best Inline Water Filters in the World... Pure and Simple.**



1-800-398-0833 USA

(208) 454-2597 • FAX: (208) 454-0026 • 1904 Industrial Way, Caldwell, Idaho 83605  
Email: sales@omnipure.com • On the Web at: www.omnipure.com

## Filtration Media Reference Guide

Following is a listing of the various standard media configurations offered in Omnipure replacement cartridges. The table on the reverse page presents the specifications for each media and the unique water conditions they address.

### GRANULAR MEDIA

#### TASTE, ODOR AND CHLORINE REDUCTION Granular Activated Carbon (GAC)

- OCB934ST T/28
- CS934 T/28
- OC200 T/33



#### SCALE REDUCTION GAC with Polyphosphate

- POCB934



#### REVERSE OSMOSIS COMPONENTS

- OCB934RO T/28 prefilter
- CS934 T/33 pre/post filter
- OCB934RO T/33 postfilter

### BLOCK MEDIA

#### TASTE, ODOR AND CHLORINE REDUCTION GAC alone or with specialty media

- OMB934-10M
- OMB934-5M
- OMB934-1M
- OMB200-10M
- OMB200-5M
- OMB200-1M



#### CYST REDUCTION One Micron GAC in block form

- OMB934-1M
- OMB200-1M




#### LEAD/CYST REDUCTION One micron GAC in block form with Lead-Specific Media

- OMB934-1ML
- OMB200-1ML



## *Specification table for the OMB, OC and CS Series of Cartridge Replacements.*

Omnipure replacement cartridges are available in our standard granular media combinations as well as carbon block configurations. OC and OMB cartridges (pictured on the other side of this sheet) fit standard 10" and 20" housings. The CS-Series cartridges (pictured right) fit 10" housings with slim profiles.

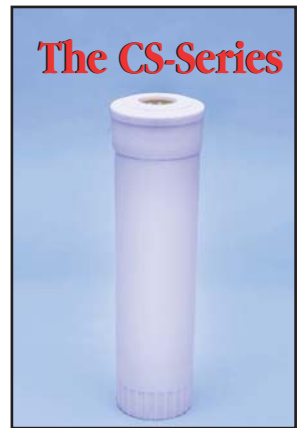

Below is a table that describes each standard media option, its attributes and ordering nomenclature. Custom media options and packaging are available. Contact your Omnipure representative for details.

### **Granular Activated Carbon**

Model #	Filter Length	Volume Cubic Inch	Service Life	Nominal Micron Rating
OCB934ST T/28	9-3/4"	56	5000	10
OCB934RO T/28	9-3/4"	56	5000	5
OCB934RO T/33	9-3/4"	56	5000	5
CS934 T/28	9-3/4"	35	3500	10
CS934 T/33	9-3/4"	35	3500	10
OC200 T/33	19-3/4"	110	7500	10
POCB934 Polyphosphate & GAC	9-3/4"	56	6 mo.	10

### **Carbon Block Cartridge Replacements**

Model #	Maximum Dimensions (O.D. x Length)	Micron Rating	Chlorine Reduction
OMB934-10M	2.87" x 9.75"	10	>10,000 Gal.
OMB934-5M	2.87" x 9.75"	5	>10,000 Gal.
OMB934-1M	2.87" x 9.75"	1	>15,000 Gal.
OMB934-1ML	2.87" x 9.75"	1	>2,500 Gal.
OMB200-10M	2.87" x 20"	10	>20,000 Gal.
OMB200-5M	2.87" x 20"	5	>20,000 Gal.
OMB200-1M	2.87" x 20"	1	>25,000 Gal.
OMB200-1ML	2.87" x 20"	1	>5,000 Gal.

**Warranty Information:** Omnipure Filter Company (Omnipure) warrants that the products delivered will be free from any defects in workmanship or materials. Further, the warranty provided herein applies, only when used within the products specifications and service life, from the date of installation or 5 years from the date of manufacture whichever occurs first, beyond which time or use Omnipure is absolved of any and all liability for any use of the product. In the event of defect or non-conformity, buyer shall promptly notify Omnipure in writing, supplying proof of purchase dates, installation dates, and will protect and retain the products for investigation, or Omnipure is absolved of any and all liability for any use of the product. There are no other warranties, either merchantability or fitness, either expressed or implied.

**NOTE:** Activated carbon filters are not intended to be used where the water is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the unit.